


FOUR POINT DIGITAL TEMPERATURE INDICATOR



Model 4DTI/200J

- | | | |
|--------------------------------------|---|---|
| 1) INPUT SENSOR | : | a) Iron-constantan thermocouple Fe-K (J) type.
b) Chromel - Alumel thermocouple Cr. Al (K) type.
(If ordered specifically, otherwise "J" type will be supplied) |
| 2) DISPLAY | : | Red 3½ digit FND, 0.56" Hight. |
| 3) RANGE | : | 0° to 199° C.
(If ordered specifically calibration upto 600° C can be made). |
| 4) COMPENSATION | : | Automatic IC based cold junction for greater accuracy |
| 5) INDICATION
ACCURACY | : | ± 1% of FSD, ± 1 digit. |
| 6) POWER SUPPLY | : | 230 V AC. ± 15%, 50 Hz. |
| 7) SIZE OF THE METER
(Bezel Size) | : | 235 mm x 110 mm. |
| 8) CUT OUT | : | 220mm x 90 mm. |
| 9) DEPTH | : | 180 mm. |
| 10) MOUNTING | : | Flush panel mounting with side clamps fixed behind panel. |

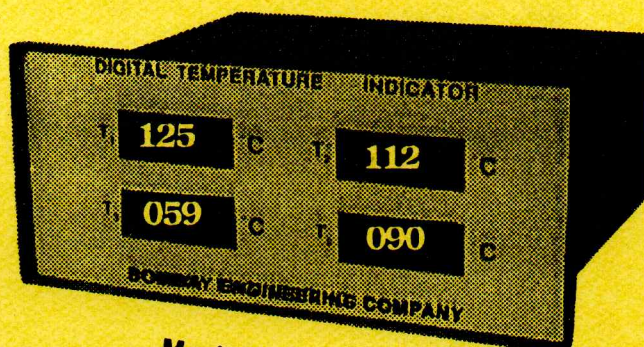